

**DIVA**

Cod. DVSE081542

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 160 lm. Rechargeable LiFePO<sub>4</sub> battery @ 600 mAh included; charging time 12 H; minimum autonomy 1.5 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

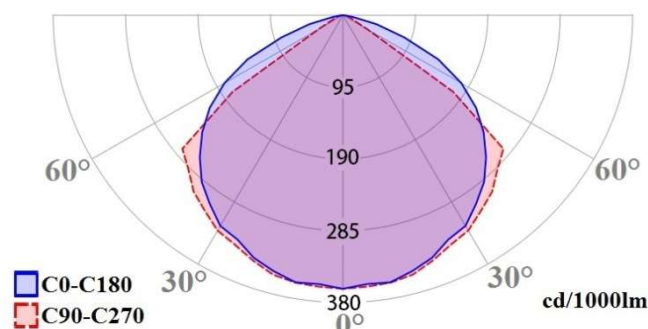
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	0.5 W
Current absorbed from Mains	50 mA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 600 mAh
Autonomy	1.5 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	160 lm
Lum. flux in Maintained mode	-

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
 Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVSE110242

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; selectable luminous flux 215lm-175lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 12 H; selectable autonomy 2H-3H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

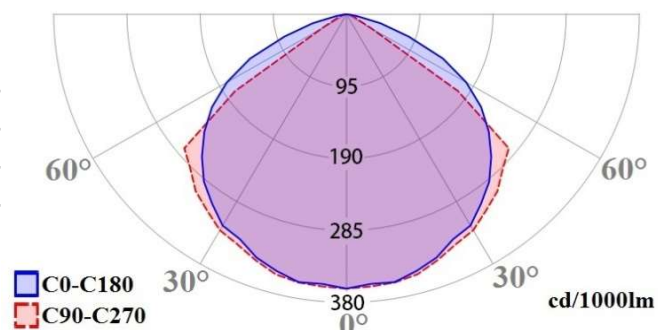
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	2H - 3H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	215lm - 175lm
Lum. flux in Maintained mode	-



**DIVA**

Cod. DVSE181542

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; selectable luminous flux 435lm-330lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 12 H; selectable autonomy 1H-1.5H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

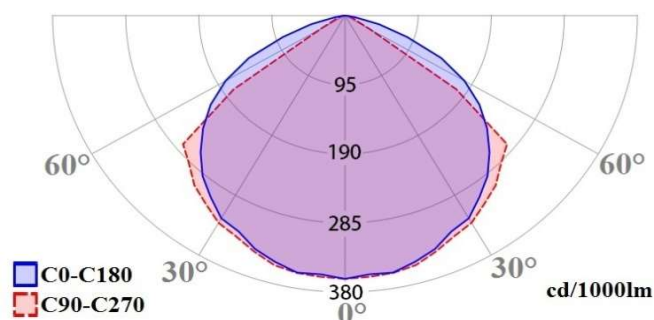
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	1H - 1.5H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	435lm - 330lm
Lum. flux in Maintained mode	-

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVSA060342

**IP42 - IP65**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 80 lm. Rechargeable LiFePO<sub>4</sub> battery @ 0.6 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Product series**

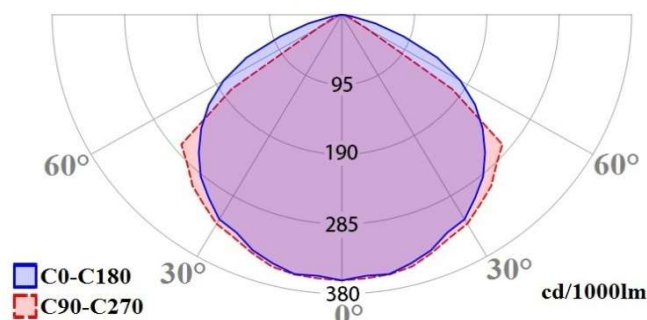
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Installation**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1.2 W
Current absorbed from Mains	50 mA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 0.6 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Dedicated terminals for rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	80 lm
Lum. flux in Maintained mode	115 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVSA081542

**IP42 - IP65**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 155 lm. Rechargeable LiFePO<sub>4</sub> battery @ 0.6 Ah included; charging time 12 H; minimum autonomy 1.5 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Product series**

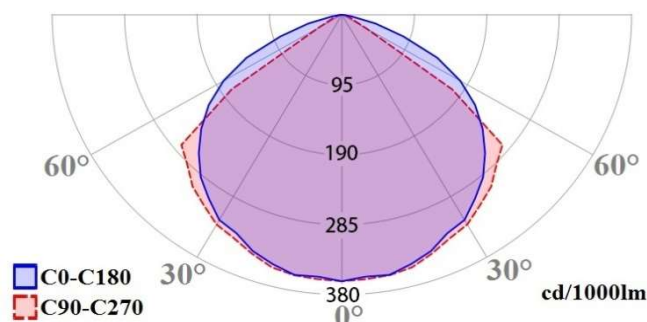
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Installation**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1.2 W
Current absorbed from Mains	50 mA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 0.6 Ah
Autonomy	1.5 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Dedicated terminals for rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	155 lm
Lum. flux in Maintained mode	115 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVSA080342

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 145 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 3 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

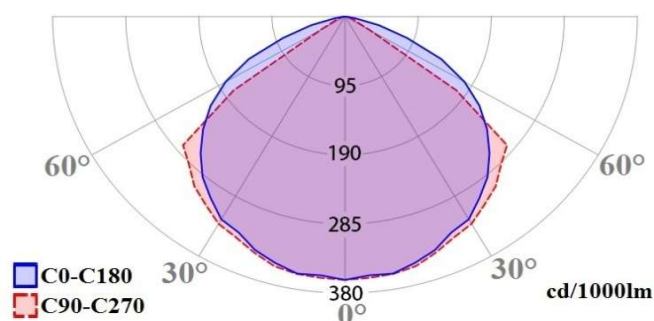
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	5.8 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	145 lm
Lum. flux in Maintained mode	145 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepredone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)



**DIVA**

Cod. DVSA110142

**IP42 - IP65**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 180 lm. Rechargeable LiFePO<sub>4</sub> battery @ 0.6 Ah included; charging time 12 H; minimum autonomy 1 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Product series**

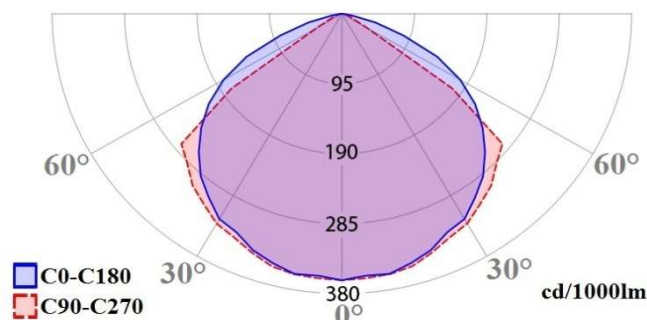
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Installation**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1.2 W
Current absorbed from Mains	50 mA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 0.6 Ah
Autonomy	1 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Dedicated terminals for rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	115 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVSA110242

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 195 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 2 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

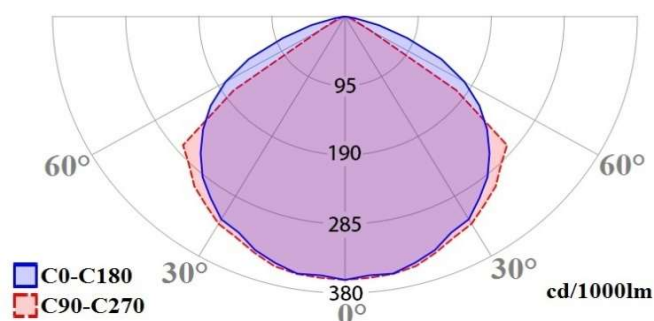
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	195 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)



**DIVA**

Cod. DVSA110342

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 195 lm. N.2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

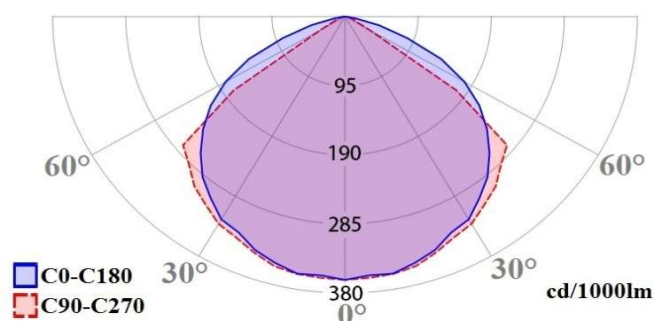
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	195 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVSA181542

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 340 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 1.5 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

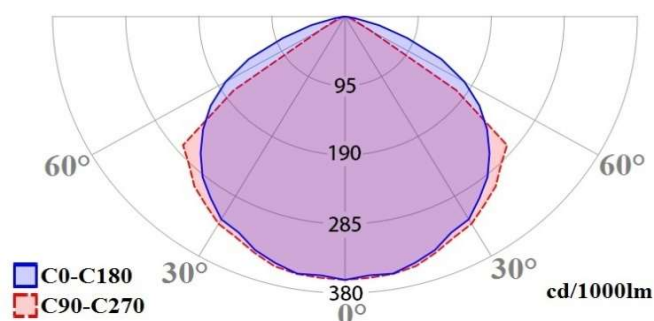
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	340 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVSA180342

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 340 lm. N.2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

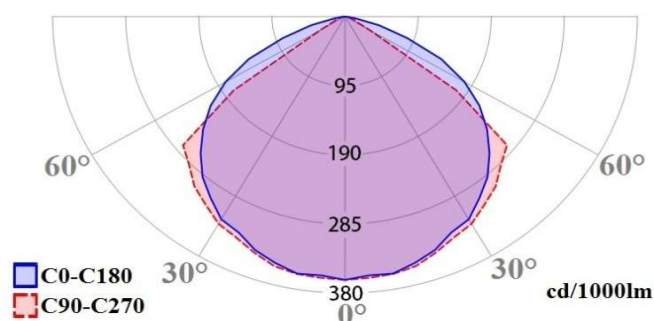
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	340 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVSA241542

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 415 lm. N.2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 1.5 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

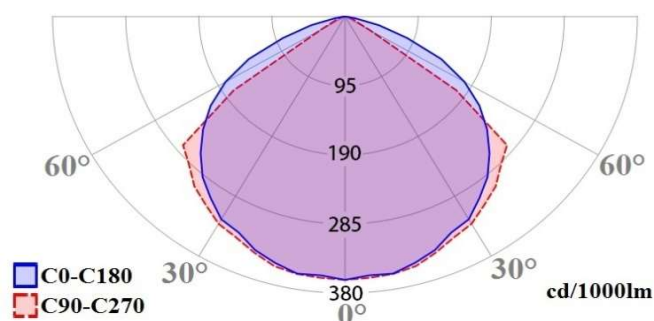
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.5 W
Maximum absorbed power in VA	7.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	415 lm
Lum. flux in Maintained mode	240 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVAA080342

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 145 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 3 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

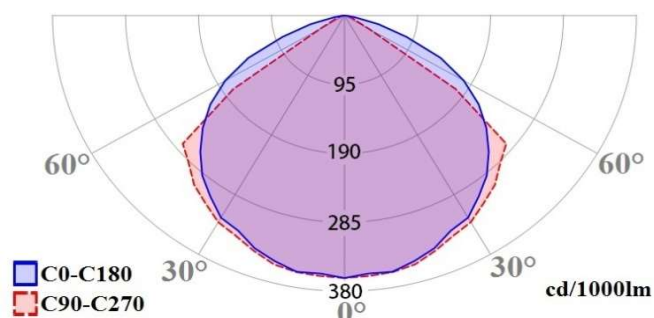
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	5.8 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	145 lm
Lum. flux in Maintained mode	145 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVAA110242

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 195 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

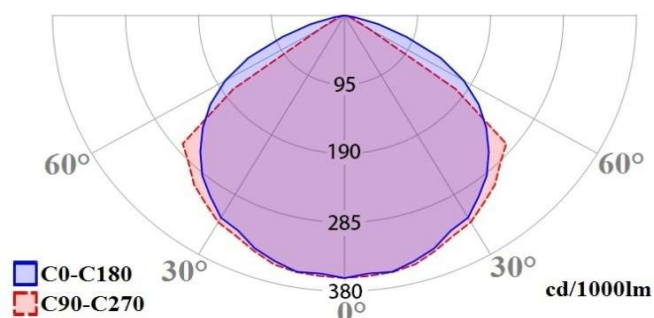
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	195 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)



**DIVA**

Cod. DVAA110342

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 195 lm. N.2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

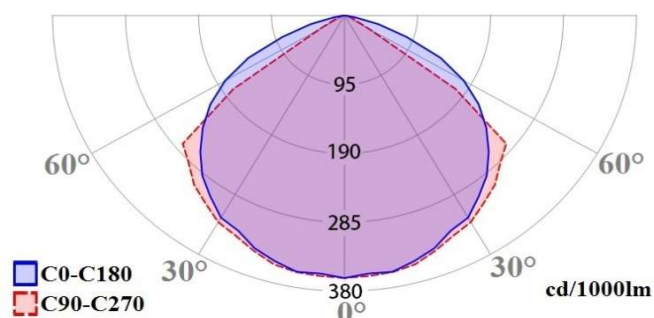
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	195 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVAA180142

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 340 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 1 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

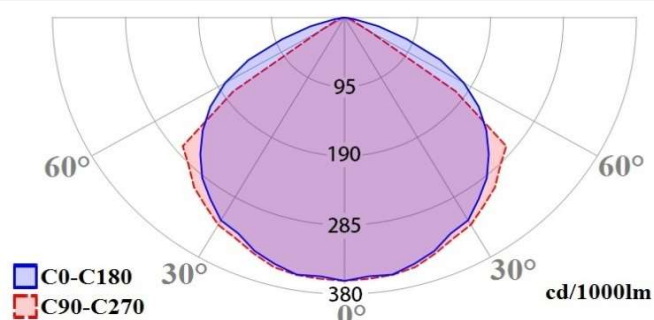
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	1 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	340 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVAA180242

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 340 lm. N.2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

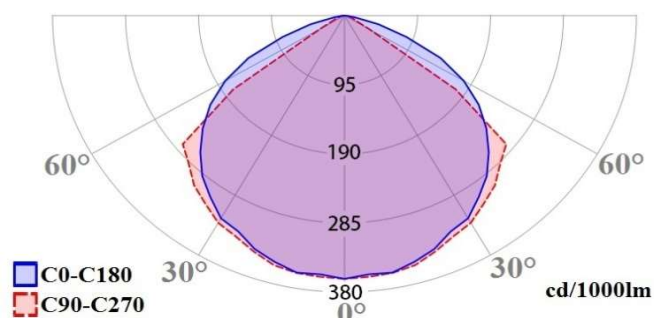
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	340 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVAA241542

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 415 lm. N.2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 1.5 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

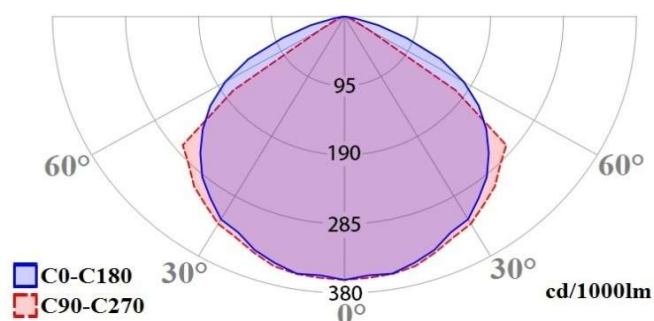
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.5 W
Maximum absorbed power in VA	7.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	415 lm
Lum. flux in Maintained mode	240 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVBA080342

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 145 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 3 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

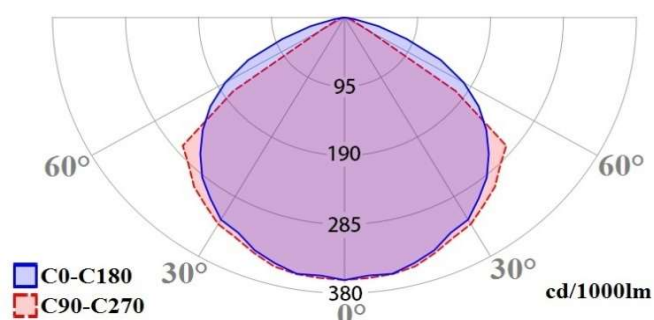
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	5.8 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	145 lm
Lum. flux in Maintained mode	145 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVBA110242

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 195 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

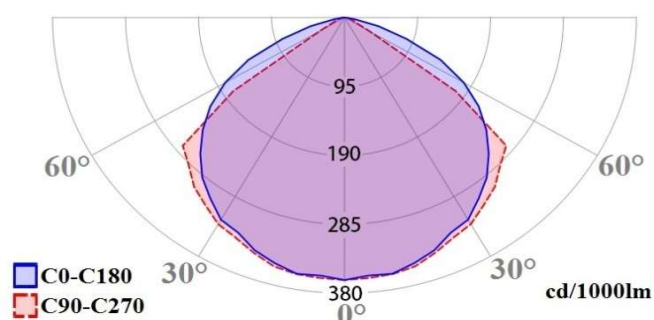
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	195 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)



**DIVA**

Cod. DVBA110342

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 195 lm. N,2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

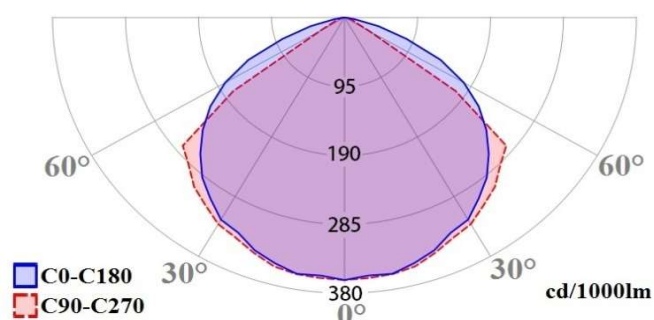
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	195 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVBA180142

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 340 lm. Rechargeable LiFePO<sub>4</sub> battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 1 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

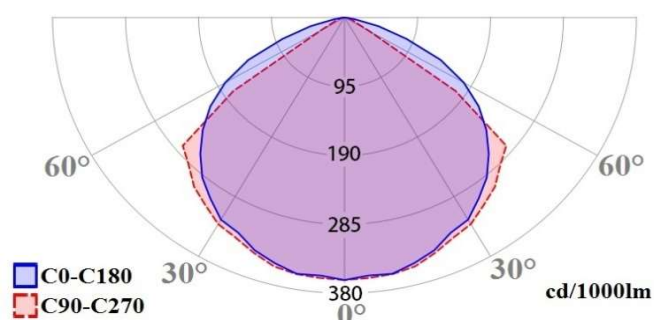
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	1 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	340 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVBA180242

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 340 lm. N.2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

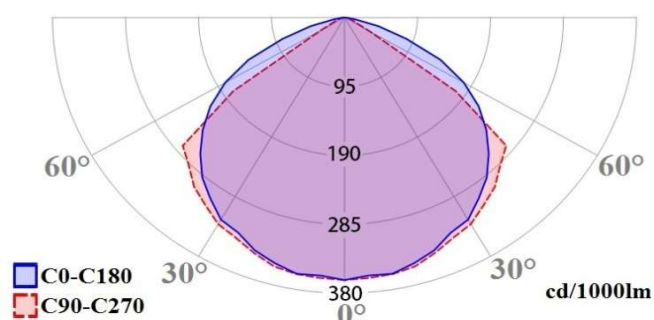
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	340 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepredone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVBA241542

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 415 lm. N.2 rechargeable LiFePO<sub>4</sub> batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 1.5 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

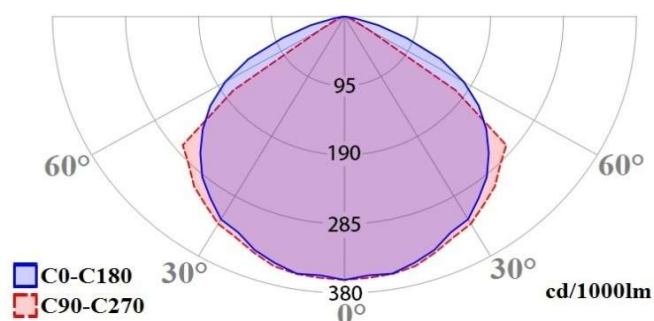
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.5 W
Maximum absorbed power in VA	7.0 VA
Battery	N.2 LiFePO <sub>4</sub> 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	415 lm
Lum. flux in Maintained mode	240 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY  
Tel. +39 0735 705007 Fax +39 0735 704912 [info@inim.biz](mailto:info@inim.biz) [www.inim.biz](http://www.inim.biz)

**DIVA**

Cod. DVLA080042

**IP42 - IP65****Introduction**

DIVA series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 145 lm. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

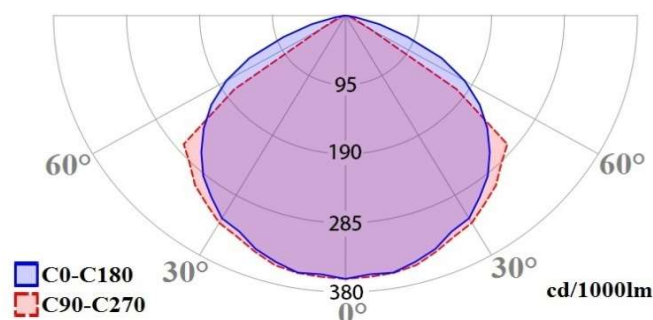
Product series	DIVA
Product type	Emergency luminaire
Version	Central Battery (alimentazione centralizzata)
Type	-
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	2.0 W
Maximum absorbed power in VA	3.4 VA
Battery	-
Autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30° ÷ 50°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Luminous flux	145 lm



**DIVA**

Cod. DVLA110042

**IP42 - IP65****Introduction**

DIVA series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 195 lm. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

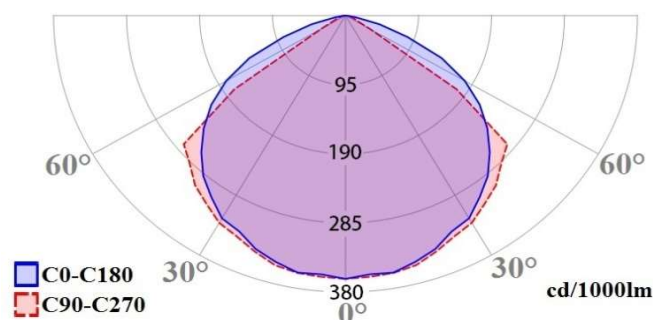
Product series	DIVA
Product type	Emergency luminaire
Version	Central Battery (alimentazione centralizzata)
Type	-
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	2.5 W
Maximum absorbed power in VA	4.2 VA
Battery	-
Autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30° ÷ 50°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Luminous flux	195 lm





**DIVA**

Cod. DVLA180042

**IP42 - IP65****Introduction**

DIVA series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 340 lm. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

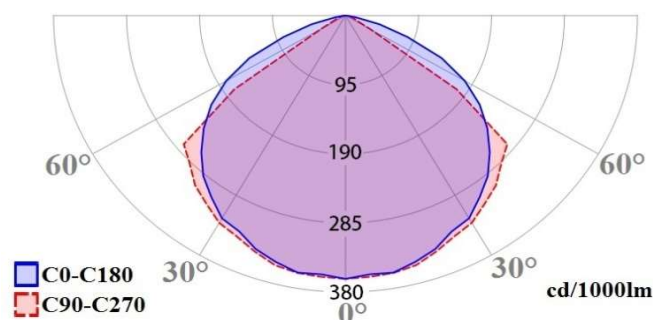
Product series	DIVA
Product type	Emergency luminaire
Version	Central Battery (alimentazione centralizzata)
Type	-
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.5 W
Maximum absorbed power in VA	7.5 VA
Battery	-
Autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30° ÷ 50°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Luminous flux	340 lm



**DIVA**

Cod. DVLA240042

**IP42 - IP65****Introduction**

DIVA series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 415 lm. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

**Description**

Product series	DIVA
Product type	Emergency luminaire
Version	Central Battery (alimentazione centralizzata)
Type	-
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

**Technical specifications**

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	5.8 W
Maximum absorbed power in VA	9.7 VA
Battery	-
Autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30° ÷ 50°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Luminous flux	415 lm

